



SP MICROPHONE AND BALANCED PATCH CABLES

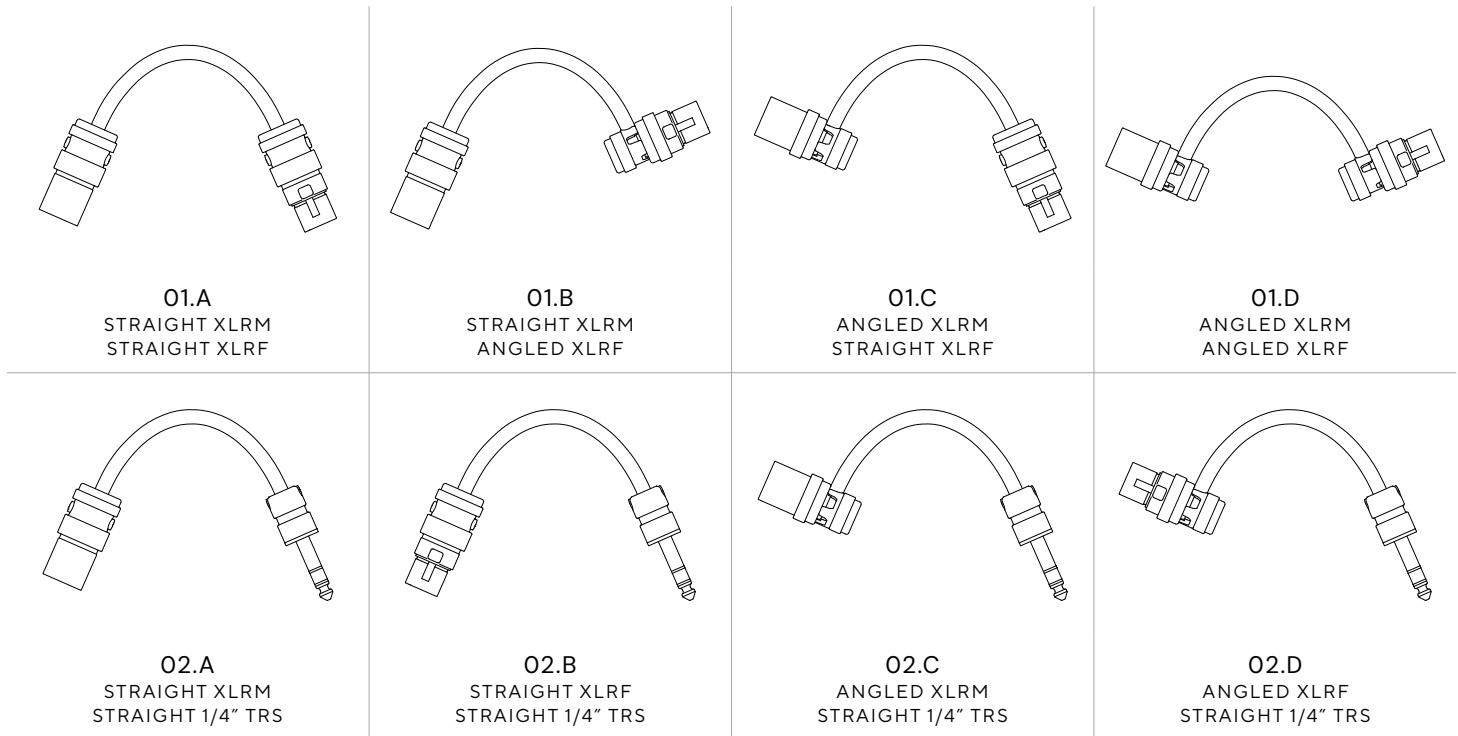


CABLE MODEL No.		SPC1805-Q – USED IN GROUPS 01 AND 02 ASSEMBLIES
APPLICATION		BALANCED SIGNALS
No. OF CONDUCTORS		4 – STAR QUAD CONFIGURATION
CONDUCTOR	MATERIAL SIZE	OXYGEN FREE COPPER AWG 24
INSULATION	MATERIAL NOMINAL DIAMETER COLOR	XLPE 1.4 MM ± 0.1 MM – 0.06 IN ± 0.004 IN BLUE / CLEAR
SHIELD	MATERIAL TYPE COVERAGE	OXYGEN FREE COPPER SPIRAL 95% – 97%
CAPACITANCE AT 1 kHz	COND. – COND.	63 pF/M ± 5% – 19.2 pF/FT ± 5%
	COND. – SCREEN	100 pF/M ± 5% – 30.5 pF/FT ± 5%
CONDUCTOR RESISTANCE		0.085 OHM/M ± 5%
JACKET	MATERIAL	PVC
	COLOR	BLACK
	NOMINAL DIAMETER	6.5 MM ± 0.1 MM – 0.256 IN ± 0.004 IN
SOLDER		ROHS LEAD-FREE SN 99.3 %, CU 0.7 %

SP INSTRUMENT CABLES




O3.A
STRAIGHT 1/4" TS
STRAIGHT 1/4" TS




O3.B
STRAIGHT 1/4" TS
ANGLED 1/4" TS

CABLE MODEL No.		SPC4718 — USED IN GROUP 03
APPLICATION		UNBALANCED SIGNALS
No. OF CONDUCTORS		1 — COAX CONFIGURATION
CONDUCTOR	MATERIAL SIZE	OXYGEN FREE COPPER AWG 24
INSULATION 1	MATERIAL NOMINAL DIAMETER	PE 1.9 MM ± 0.1 MM — 0.08 IN ± 0.004 IN
INSULATION 2	MATERIAL NOMINAL DIAMETER	PVC 2.5 MM ± 0.1 MM — 0.1 IN ± 0.004 IN
SHIELD	MATERIAL TYPE COVERAGE	OXYGEN FREE COPPER SPIRAL 95% — 97%
CAPACITANCE AT 1 kHz	COND. — SCREEN	70 pF/M ± 5% — 21 pF/FT ± 5%
CONDUCTOR RESISTANCE		0.08 OHM/M ± 5%
JACKET	MATERIAL	PVC
	COLOR	BLACK
	NOMINAL DIAMETER	6.3 MM ± 0.1 MM — 0.24 IN ± 0.004 IN
SOLDER		ROHS LEAD-FREE SN 99.3 %, CU 0.7 %

SP PEDALBOARD CABLES



O4.A
 ANGLED 1/4" TS
 ANGLED 1/4" TS



O4.B
 STRAIGHT 1/4" TS
 ANGLED 1/4" TS

CABLE MODEL No.		SPC0805 — USED IN GROUP O4
APPLICATION		UNBALANCED SIGNALS
No. OF CONDUCTORS		1 — COAX CONFIGURATION
CONDUCTOR	MATERIAL SIZE	OXYGEN FREE COPPER AWG 24
INSULATION 1	MATERIAL NOMINAL DIAMETER	PE 1.9 MM ± 0.1 MM — 0.08 IN ± 0.004 IN
INSULATION 2	MATERIAL NOMINAL DIAMETER	PVC 2.5 MM ± 0.1 MM — 0.1 IN ± 0.004 IN
SHIELD	MATERIAL TYPE COVERAGE	OXYGEN FREE COPPER SPIRAL 95% — 97%
CAPACITANCE AT 1 kHz	COND. — SCREEN	80 pF/M ± 5% — 24 pF/FT ± 5%
CONDUCTOR RESISTANCE		0.08 OHM/M ± 5%
JACKET	MATERIAL	PVC
	COLOR	BLACK
	NOMINAL DIAMETER	4.5 MM ± 0.1 MM — 0.18 IN ± 0.004 IN
SOLDER		ROHS LEAD-FREE SN 99.3 %, CU 0.7 %